



# VERTICAL STORAGE TANKS • Insulated and Jacketed

## AquaPLEX® STORAGE TANK (UNLINED DUPLEX ALLOY)


### TANK SERIES 125 - 3000 GALLONS

Model No.	Gallons Storage	Dimensions in Inches					Water Inlet and Outlet Connections NPT	Approx. Shipping Weight lbs
		A	B	C	D	F		
L 125A-TR	125	29 1/2	75	15	23	20	2	755
L 150A-TR	150	34x37	65	19	27	21	2	815
L 175A-TR	175	34x37	71	19	27	21	2	855
L 215A-TR	215	34x37	78	19	27	21	2	895
L 250A-TR	250	46	63	19	27	31	2	945
L 300A-TR	300	46	75	19	27	31	2	1010
L 400A-TR	400	46	87	19	27	31	2	1070
L 500A-TR	500	56	78	23	31	31	3	1415
L 600A-TR	600	56	90	23	31	31	3	1605
L 750A-TR	750	67	83	23	31	40	3	1770
L 900A-TR	900	67	95	23	31	40	3	1990
L 1000A-TR	1000	67	107	23	31	40	3	2210
L 1250A-TR	1250	75	96	23	31	47	3	3030
L 1500A-TR	1500	75	108	23	31	47	3	3245
L 1750A-TR	1750	75	132	23	31	47	3	3685
L 2000A-TR	2000	75	144	23	31	47	3	4160
L 2500A-TR	2500	75	156	23	31	47	3	4425
L 3000A-TR	3000	75	180	23	31	47	3	4865

Dimensions are in inches unless otherwise noted.  
 For larger storage capacities, consult factory.  
 For standard and optional equipment, see form PV 8066.



Tank sizes 1000, and 1500 - 3000 gallon include horizontal shipping skids (not shown).

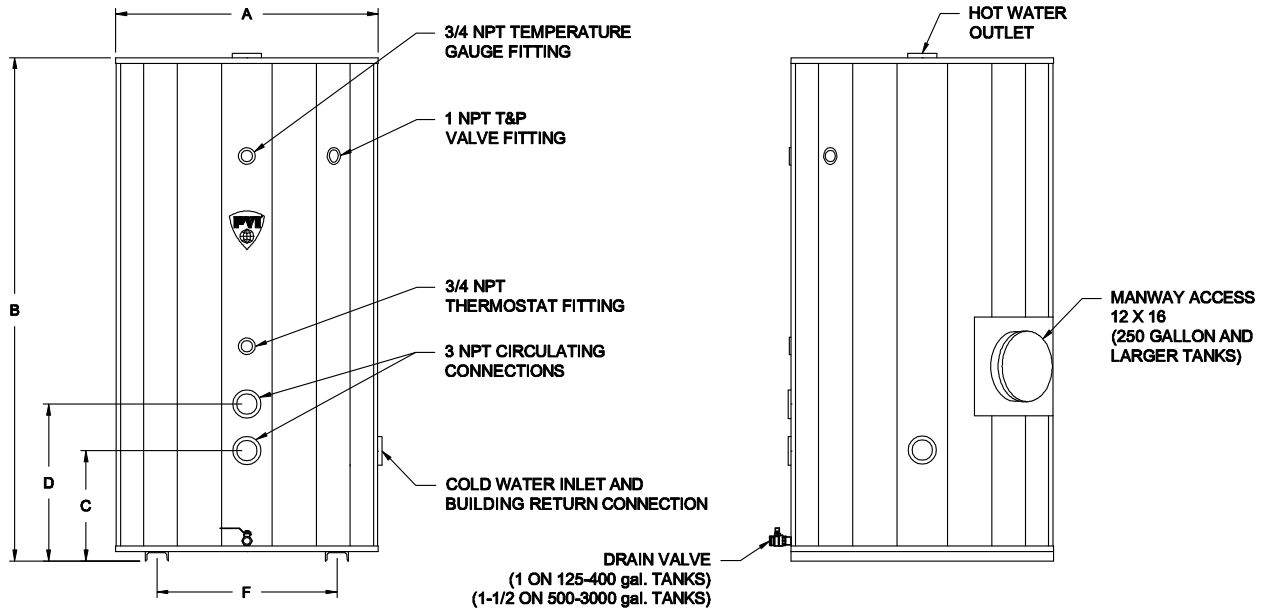

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.

# AquaPLEX® Storage Tanks

## Unlined Duplex Alloy, Vertical Storage



### **STANDARD FEATURES and EQUIPMENT**

#### **PRESSURE VESSEL**

- ASME stamped and National Board Registered for 150 psi MAWP
- Nonferrous removable fittings at all tank connections
- Lifting lugs
- Removable top head < 250 gallons
- Manway tank access ≥ 250 gallons
- Steel base skid
- Fiberglass insulation
- Coated steel jacket panels
- Tie down anchor points on tank
- Bottom drain valve

#### **WARRANTY and SERVICE POLICY**

- 25-year tank warranty (PV901) ①

#### **CODES AND STANDARDS**

- ASHRAE 90.1 compliant
- Intertek / ETL listed NSF372 lead-free

① See complete warranties and service policies for full details.

PVI reserves the right to change the design and specification without notice.

### **PART NUMBERS SEQUENCE**

Base PN	PN W/Flow Diffusers	Model
135747	135957	L 125 ATR
135674	135955	L 150 ATR
135673	135953	L 175 ATR
135615	135950	L 215 ATR
132619	135945	L 250 ATR
135787	135960	L 300 ATR
135792	135963	L 400 ATR
135806	135965	L 500 ATR
135836	135968	L 600 ATR
135895	135970	L 750 ATR
135898	135973	L 900 ATR
138032	138034	L 1000 ATR
138030	138033	L 1250 ATR
135899	135975	L 1500 ATR

### **FIELD INSTALLED OPTIONS** (Ordered as a line item)

- Tank thermostat with 3/4" well (PN 128516)
- Relief Valve Kit 1-inch 150 psi (PN 102563)
- Installation kit 125-400 gallon (PN 143406)
- Installation kit 500-3000 gallon (PN 143407)

### **OPTIONAL SERVICE POLICIES**

- 1-year cost-free service policy (PV 551) ①  
Conditions exist outside of the continental United States
- Long-life service policy (PV559) ①  
Conditions exist outside of the continental United States

### **CUSTOM CONFIGURATION**

Consult representative for all additional custom option



PVI Industries, LLC  
Fort Worth, TX • (800) 784-8326 • www.pvi.com